

Blok


BLOK is an industrial luminaire for use in high open spaces. Its different optics optimize the savings in the number of luminaires and the total

consumption in the installation. There are two different shapes available: square (Blok) and round (Blok R).

There are three different optics available:

- Intensive (30°)
- Medium (60°)
- Extensive (90°)



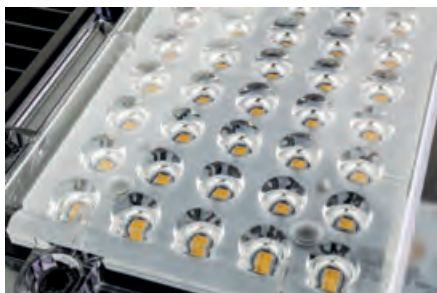

Blok

Blok R

Installation	Ceiling suspended mounted Ceiling surface mounted	Ceiling suspended mounted
Diffuser	☼	☼
Light source	LED	LED
Photobiological safety	1	1
UGR	22	22
CRI	>80	>80
MacAdam ellipse	3	3
Beam angle range	30-90	30-90
Power range (W)	154	154
Colour temperature (°K)	5000	5000
Light range	21000	21000
Power factor	0,95	0,95
Efficiency (%)	89,4	89,4
Expectancy	60000 h L70B10	60000 h L70B10
DALI Option	✓	✓
Continuous function 24h	✓	✓
IP	67	67
IK	07	07
Class	I	I

☼ PMMA lens



For other CRI values, please contact us.



Blok



Ceiling suspended mounted



Ceiling surface mounted



IP 67

IK 07

CRI >80

UGR 22

30-90°



Expectancy
60000 h.
L70B10

Efficiency (%)
89,4

Photobiological safety


RG0	Risk free
RG1*	1 Low risk
RG2	Moderate risk
RG3	High risk

*Time under 3 h.

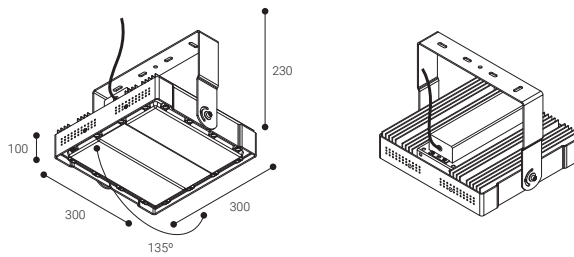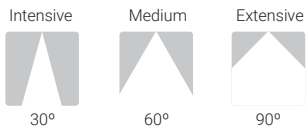


● RAL9005

Intensive optics




— C0-C180
— C90-C270 $\eta=89\%$

Medium optics



— C0-C180
— C90-C270 $\eta=88\%$

Extensive optics



— C0-C180
— C90-C270 $\eta=85\%$



Compatible with **NormaLINK**

	W	K	LUMEN	OPTICS	COLOUR	ETA
BKA205DSN	1x154W	5000	21000 lm	30° Intensive	●	5,6
BKA205DMN	1x154W	5000	21000 lm	60° Medium	●	5,6
BKA205DFN	1x154W	5000	21000 lm	90° Extensive	●	5,6

Blok R



IP 67	IK 07	CRI >80	UGR 22	 30-90°
-----------------	-----------------	----------------------	------------------	-------------------




Expectancy
60000 h.
L70B10

Efficiency (%)
89,4

Photobiological safety


RG0	Risk free
RG1*	1 Low risk
RG2	Moderate risk
RG3	High risk

*Time under 3 h.

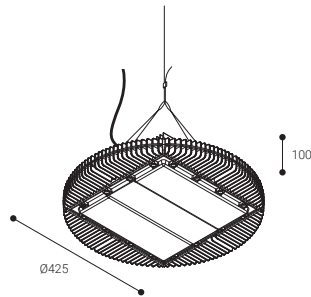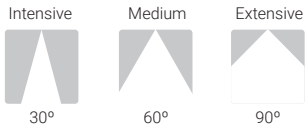


● RAL9005


Intensive optics



Medium optics



Extensive optics



Compatible with **NormalINK**

	W	K	LUMEN		OPTICS	COLOUR	
BRS205DSN	1x154W	5000	21000 lm	30°	Intensive	●	5,6
BRS205DMN	1x154W	5000	21000 lm	60°	Medium	●	5,6
BRS205DFN	1x154W	5000	21000 lm	90°	Extensive	●	5,6